

## Fiber Optic Splice Closures

### GJS(04) In-line Closure

GJS(04) series are suitable for cables whose diameter ranges 10-23mm, they can be used in aerial, duct, and direct buried application; these products are made of high quality material and with mechanical sealing structure filled with sealing material; the external components and fastening parts are all made of stainless steel; it can be reopened and reused without changing sealing material.

**Standards:**

YD/T814-1996.

**Product showcase:**



GJS(04)-1



GJS(04)-2



GJS(04)-3



GJS(04)-3PB



GJS(04)-3Y




GJS(04)-3S



GJS(04)-5



GJS(04)5B



GJS(04)5C



GJS(04)-6



GJS(04)-7



GJS(04)-7B



GJS(04)-8



GJS-(04)5D



GJS-(04)5E

## Product Specifications

型号 Type	尺寸(mm) Dimension	适合光缆直径(mm) Cable diameter	熔纤盘最大芯 Capacity of splice tray	光缆进出口数 Cable ports	最大容量 (芯) Max capacity	密封方式 Sealing structure
GJS(04)-1	435X190X85	φ 10- φ 17	24 (单芯single fiber)	4	96 (单芯single fiber)	自粘胶带 Sticky cincture
GJS(04)-2	435X190X120	φ 10- φ 22	24 (单芯single fiber)	4	168 (单芯single fiber)	自粘胶带 Sticky cincture
GJS(04)-3	435X190X120	φ 10- φ 22	24 (单芯single fiber)	4	192 (单芯single fiber)	自粘胶带 Sticky cincture
GJS(04)3-PB	435X190X120	φ 10- φ 22	24 (单芯single fiber)	4	144 (单芯single fiber)	自粘胶带 Sticky cincture
GJS(04)-3Y	460X180X120	φ 10- φ 22	24 (单芯single fiber)	4	168 (单芯single fiber)	自粘胶带 Sticky cincture
GJS(04)-5	435X190X80	φ 10- φ 17	24 (单芯single fiber)	4	96 (单芯single fiber)	自粘胶带 Sticky cincture
GJS(04)5B	350X145X90	φ 10- φ 22	12 (单芯single fiber)	4	48 (单芯single fiber)	硅橡胶 silicon gum material
GJS(04)5C	200X220X42	φ 10- φ 12	16 (单芯single fiber)	4	16 (单芯single fiber)	硅橡胶 silicon gum material
GJS(04)-6	435X140X75	φ 10- φ 12.5	24 (单芯single fiber)	2	48 (单芯single fiber)	自粘胶带 Sticky cincture
GJS(04)-7	435X190X170	φ 10- φ 22	24 (单芯single fiber)	8	288 (单芯single fiber)	自粘胶带 Sticky cincture
GJS(04)-7B	470X240X120	φ 10- φ 22	24 (单芯single fiber)	8	192 (单芯single fiber)	自粘胶带 Sticky cincture
GJS(04)-8	420X150X110	φ 10- φ 23	24 (单芯single fiber)	6	96 (单芯single fiber)	自粘胶带 Sticky cincture
GJS(04)-3S	425X175X120	φ 10- φ 22	24 (单芯single fiber)	4	168 (单芯single fiber)	自粘胶带/硅橡胶 Sticky cincture silicon gum material
GJS-(04)5D	245X150X30	φ 7 - φ 10	12 (单芯single fiber)	4	12 (单芯single fiber)	硅橡胶 silicon gum material
GJS-(04)5E	280X180X56	φ 7 - φ 22	12 (单芯single fiber)	6	48 (单芯single fiber)	硅橡胶 silicon gum material


## GJS(05) In-line Closure

GJS(05) series provide with 4 fiber cable in-out ports; The products are made of high quality material and with mechanical sealing structure filled with the sealing material, can be used in the harsh weather; The external components and fastening parts are all made of stainless steel; It can be reopened and reused without changing sealing material; It can be used in aerial, duct, and direct buried application.

### Standards:

YD/T814-1996.

### Product showcase:

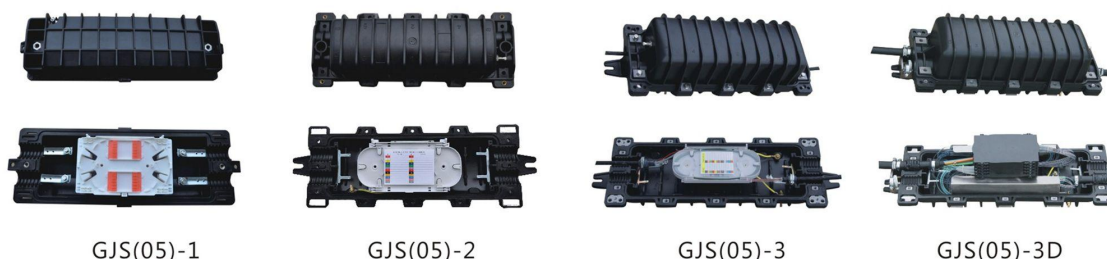

GJS(05)-1

GJS(05)-2

GJS(05)-3

GJS(05)-3D

### Product Specifications

型号 Type	GJS(05)-1	GJS(05)-2	GJS(05)-3	GJS(05)-3D
尺寸(mm) Dimension	485(440)×165X110	580(480)×185X125	655(550)×215X185	655(550)×215X185
适合光缆直径(mm) Cable diameter	φ 10- φ 22	φ 10- φ 22	φ 10- φ 22	φ 10- φ 22
熔纤盘最大芯 Capacity of splice tray	24 (单芯single fiber)	24 (单芯single fiber)	24 (单芯single fiber)	72 (带状ribbon fiber)
最多熔纤盘数量 Max qty of splice tray	4	6	8	5
最大容量 (芯) Max capacity	96 (单芯single fiber)	144 (单芯single fiber)	192 (单芯single fiber)	360 (带状ribbon fiber)
密封方式 Sealing structure	自粘胶带 Sticky cincture	自粘胶带 Sticky cincture	自粘胶带 Sticky cincture	自粘胶带 Sticky cincture
外包装尺寸(mm) Outer carton diameter	550*380*385 /6pcs	610*400*410 /6pcs	690*505*435 /4pcs	690*505*435 /4pcs
外包装体积(m3) Outer carton volume	0.080	0.100	0.152	0.152
外包装重量(kg) Outer carton weight	16	22.5	23.9	23.9

## GJSM Dome Closure

GJS-M series can provide with 3 type: 2 in 2 out, 3 in 3 out, 4 in 4 out. They can satisfy customer's different applications; they can be installed by pole mounted, wall-mounted, aerial. They can be divided into 2 types according to the sealing type: screw tread mechanical and heat shrinkable.

### Standards:

YD/T814-1996.

### Product showcase:



## Product Specifications

型号 Type	GJS-M3/JF	GJS-M3/RS	GJS-M5/RS	GJS-M7/RS
尺寸(mm) Dimension	φ 190×410	φ 190×435	φ 210×540	φ 230×550
适合光缆直径(mm) Cable diameter	φ 7- φ 22	φ 7- φ 22	φ 7- φ 22	φ 7- φ 22
进出缆数 Cable ports	二进二出 2 in,2 out	二进二出 2 in,2 out	三进三出 3 in,3 out	四进四出 4 in,4 out
熔纤盘最大芯 Capacity of splice tray	24(单芯single fiber)	24(单芯single fiber)	72(带纤ribbonfiber) 24(单芯single fiber)	24(单芯single fiber)
最多熔纤盘数量 Max qty of splice tray	4	4	4	6
最大容量 (芯) Max capacity	96(单芯single fiber)	96(单芯single fiber)	96(单芯single fiber) 288(带纤ribbonfiber)	144 (单芯single fiber)
密封方式 Sealing structure	螺纹机械密封 硅橡胶 screw thread mechanical seal silicon gum material	热缩管 硅橡胶 Heat shrinkable sealing structure silicon gum material	热缩管 硅橡胶 Heat shrinkable sealing structure silicon gum material	热缩管 硅橡胶 Heat shrinkable sealing structure silicon gum material
外包装尺寸(mm) Outer carton diameter	550x450x480/ 6pcs	550x450x480/ 6pcs	465x405x575/ 4pcs	540x485x465/4pcs
外包装体积(m3) Outer carton volume	0.111	0.119	0.108	0.12
外包装重量(kg) Outer carton weight	15.5	15.0	15.6	12. 3